


#	Part	Qty
1	Manway	1
2	1" TC Port (Temp Well)	1
3	1.5" TC Port	2
4	2" TC Port (CIP)	1
5	1.5" TC Port (PRV)	1
6	1" NPT (Glycol)	4
7	2" TC Port (Racking Arm)	1
8	1.5" TC Port (Drain)	1
9	Sprayball	1
10	Ø8" Foot Pad	Leg #

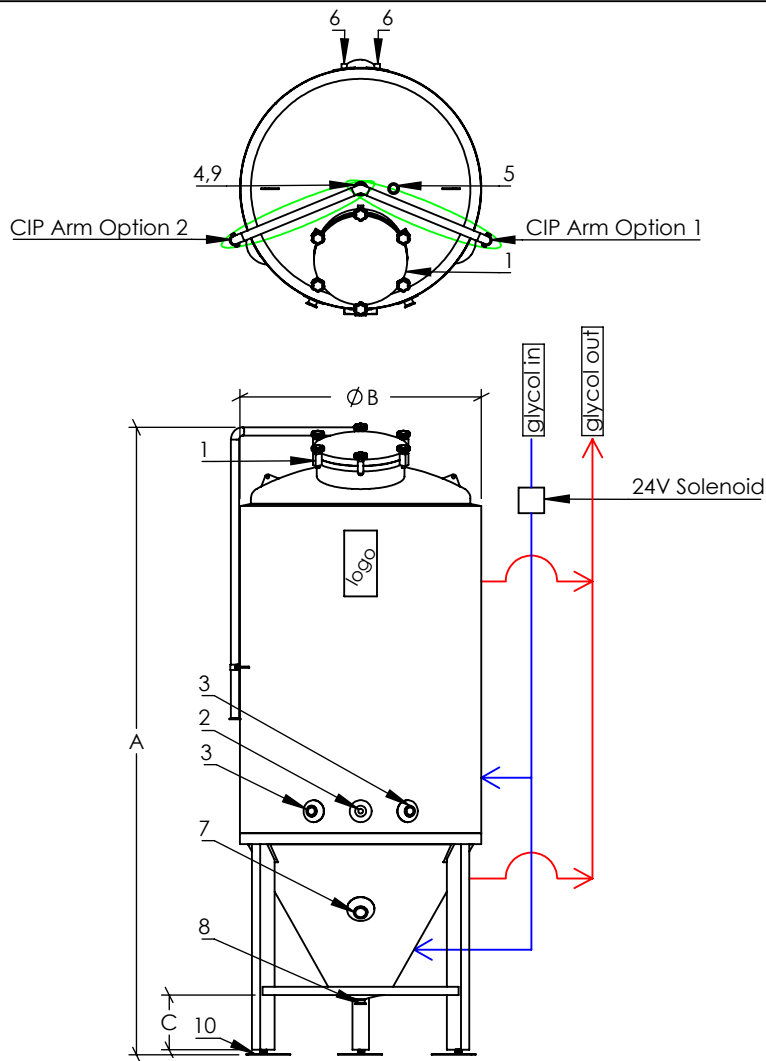

Tank #: _____

CIP ARM LOCATIONS:

please indicate your preferred CIP Arm location for the corresponding tank #

Option 1: Right Side of Tank

Option 2: Left Side of Tank

COMMENTS:

Length of temp probe wire needed (please circle):

5m

10m

25m

PKW FERMENTER SPECS

BREWERY NAME: _____

Approved

Approved with Revisions

Not Approved

Customer Signature

Printed Name

Date

Model #	Select	Capacity (BBL) *	Total Capacity (gal) *	Cone Capacity (gal) *	Sidewall Capacity (gal/in) *	Tank Dimensions (inch)			Manway Location		Loads (lbs)		Legs	
						A*	B	C	Top	Side	Empty*	Live*	#	Size
3.5FV30	<input type="checkbox"/>	3.5	136.1	26	3.1	92	34	~10	Standard	Available (additional cost)	350	1435	3	3"
5FV36	<input type="checkbox"/>	5	204.2	45.3	4.4	86	40	~10	Standard	Available (additional cost)	500	2050	3	3"
7FV36	<input type="checkbox"/>	7	257.1	45.3	4.4	98	40	~10	Standard	Available (additional cost)	700	2870	3	3"
7FV40	<input type="checkbox"/>	7	258.4	62.3	5.4	90	44	~10	Standard	Available (additional cost)	700	2870	3	3"
10FV40	<input type="checkbox"/>	10	389	62.3	5.4	114	44	~10	Standard	Available (additional cost)	1000	4100	3	3"
15FV48	<input type="checkbox"/>	15	578.3	108	7.8	122	52	~10	Standard	Available (additional cost)	1500	6150	4	4"
20FV55	<input type="checkbox"/>	20	779.8	162.7	10.3	126	59	~10	Standard	Available (additional cost)	2000	8200	4	4"
30FV60	<input type="checkbox"/>	30	1092.7	211.4	12.2	143	64	~10	Standard	Available (additional cost)	3000	12300	4	4"
40FV65	<input type="checkbox"/>	40	1475.6	268.9	14.4	160	69	~10	Standard	Available (additional cost)	4000	16400	5	4"
60FV88	<input type="checkbox"/>	60	2247.8	668	26.3	160	92	~10	Standard	Available (additional cost)	6000	24600	5	4"

*Approximate



CRAFT GEAR
CRAFT BEER

Office: 503-236-4500
Fax: 503-236-4513
Main Contact: 503-314-7134 (Joe W)
Project Mgmt: 971-8031783 (Alex O)

Main Contact: Joe@Portlandkettleworks.com
Project Mgmt: Alex@PortlandKettleWorks.com
Design: Maggie@PortlandKettleWorks.com
Manufacturing: Patrick@PortlandKettleWorks.com

www.PortlandKettleWorks.Com